

Explosion - proof Cable Glands(Single Seal, Unarmoured)

KBM-01,02 Series

-  II 2 G Ex eb IIC Gb
-  II 3 G Ex nR IIC Gc
-  II 2 D Ex tb IIIC Db



KBM-01




KBM-02

1. Application and Features

- Explosion proof certificates
 - ATEX : TPS 22 ATEX 114950 0001 X
 - IECEx : IECEx TPS 22.0023X
- Application in hazardous area
 - Zone 1 and Zone 2,
 - Zone 21 and Zone 22
- Increased safety (Type 'e'), restricted breathing (Type 'nR'), combustible dust (Type 'tb') structure.
- Single seal for unarmoured cables.
- External hexagon and stripe compression nuts are available.
- Can be installed on Ex i (intrinsic safety type) equipment.


2. Product definition

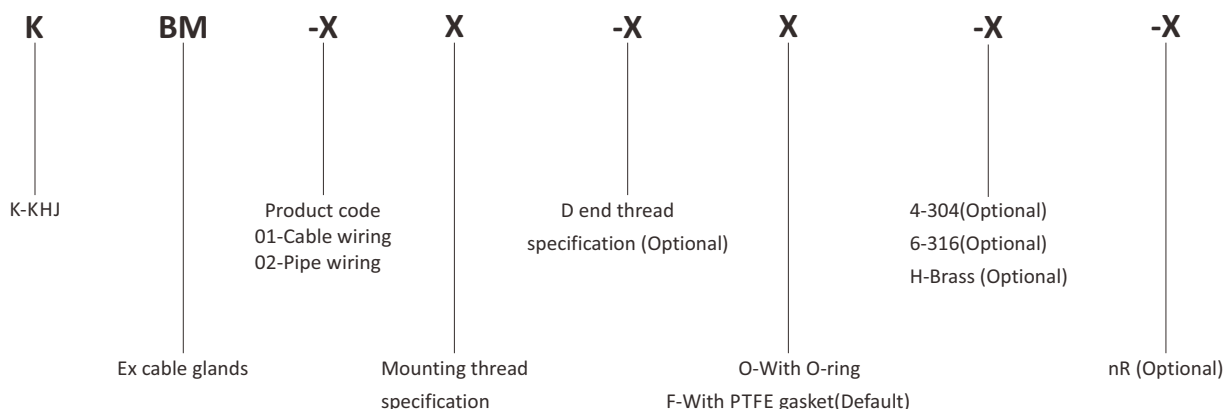


3. Technical Parameter

Explosion protection	Ex marking	 II 2 G Ex eb IIC Gb	Ex eb IIC Gb
		 II 3 G Ex nR IIC Gc	Ex nR IIC Gc
		 II 2 D Ex tb IIIC Db	Ex tb IIIC Db
Exectutive standards		IEC60079-0,IEC60079-7,IEC60079-15,IEC60079-31 EN60079-0, EN60079-7, EN60079-15, EN60079-31	
Material		Stainless steel, nickel plated brass, brass, etc.	
Degree of protection		IP66	
Ambient temperature		-43°C~+100°C	
Connection thread		NPT thread, Metric thread (M)	

4. Outline and Installation(mm)

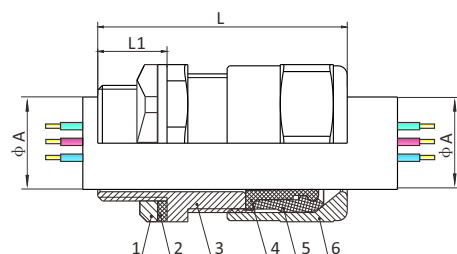

KBM-01

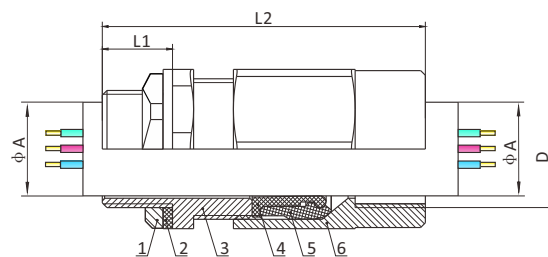

KBM-02

1.Locknut 2.Sealing washer 3.Inlet connector
4.Sealing ring 5.Sealing ring loop 6. Compression nut

1.Locknut 2.Sealing washer 3.Inlet connector
4.Sealing ring 5.Sealing ring loop 6. Compression nut

Mounting thread		Cable outer diameter ϕA (mm)	Thread length L1(mm)	Length L(mm)	Length L2(mm)	Maximum outer diameter (mm)	KBM-01 Weight (kg)	KBM-02 Weight (kg)
M	NPT							
M16×1.5	—	5.5~12	16	56	71	29	0.13	0.14
M20×1.5A	NPT1/2A	5.5~12	16	56	71	29	0.13	0.14
M20×1.5B	NPT1/2B	9.5~16	16	56	71	29	0.11	0.13
M25×1.5A	NPT3/4A	9.5~16	16	56	71	29	0.15	0.17
M25×1.5B	NPT3/4B	12.5~20.5	16	56	71	37	0.17	0.19
M32×1.5A	NPT1A	12.5~20.5	18	58	73	39	0.25	0.28
M32×1.5B	NPT1B	17~26	18	60	75	44	0.23	0.26
M40×1.5A	NPT1 1/4A	17~26	18	60	75	50	0.60	0.63
M40×1.5B	NPT1 1/4B	22~33	18	65	80	55	0.48	0.51
M50×1.5A	NPT1 1/2A	22~33	20	67	82	55	0.91	0.96
M50×1.5B	NPT1 1/2B	28~41	20	70	85	67	0.75	0.79
M63×1.5A	NPT2A	28~41	21	71	84	73	0.78	0.85
M63×1.5B	NPT2B	36~52.6	21	84	97	73	0.86	0.92

Note: 1. Locknut and sealing washer(PTFE gasket) are supplied as standard when delivery. Above weight is based on nickel plated brass material..

2. Earth lug and shroud are for optional.

3. The standard pitch of metric thread products is 1.5mm, other pitches can be customized, please specify when ordering.