

Explosion - proof Cable Glands(Single Seal, Unarmoured)

KBM-07,08 Series

 II 2 G Ex db IIC Gb

 II 2 G Ex eb IIC Gb

 II 3 G Ex nR IIC Gc

 II 2 D Ex tb IIIC Db



KBM-07




KBM-08

1. Application and Features

- Explosion proof certificates
 - ATEX : TPS 22 ATEX 114950 0001 X
 - IECEx : IECEx TPS 22.0023X
- Application in hazardous area
 - Zone 1 and Zone 2,
 - Zone 21 and Zone 22
- Flame-proof (Type 'd'), Increased safety (Type 'e'), restricted breathing (Type 'nR'), combustible dust (Type 'tb') structure.
- Single seal for unarmoured cables.
- External hexagon and stripe compression nuts are available.
- Can be installed on Ex i (intrinsic safety type) equipment.


2. Product definition

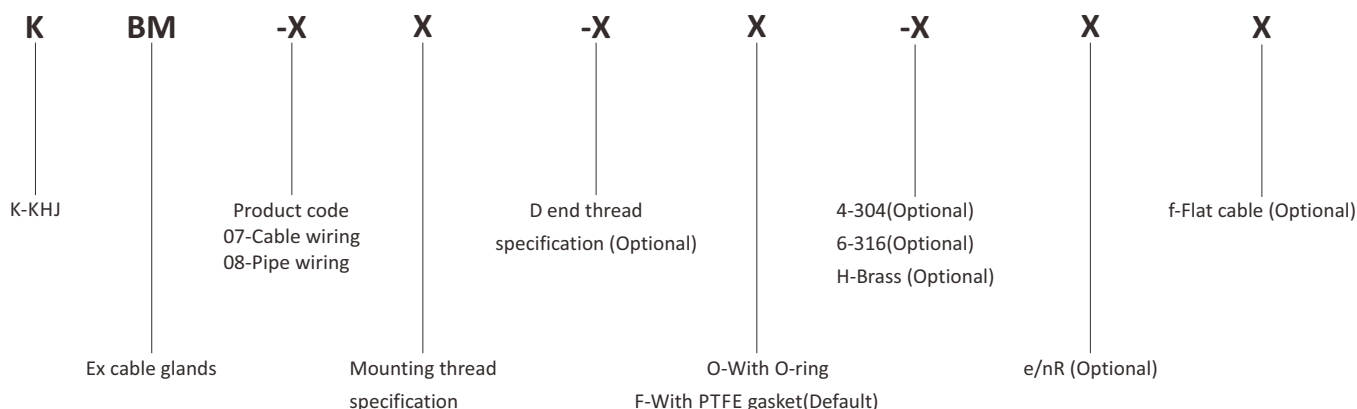

3. Technical Parameter


Explosion protection	Ex marking	 II 2 G Ex db IIC Gb	Ex db IIC Gb
		 II 2 G Ex eb IIC Gb	Ex eb IIC Gb
		 II 3 G Ex nR IIC Gc	Ex nR IIC Gc
		 II 2 D Ex tb IIIC Db	Ex tb IIIC Db
Exectutive standards		IEC60079-0,IEC60079-1,IEC60079-7,IEC60079-15,IEC60079-31 EN60079-0, EN60079-1, EN60079-7, EN60079-15, EN60079-31	
Material		Stainless steel, nickel plated brass, brass, etc.	
Degree of protection		IP66, IP67, IP68(2m/72h)	
Ambient temperature		-43°C~+100°C, -43°C~+120°C(f type)	
Connection thread		NPT thread, Metric thread (M)	

4.Outline and Installation(mm)

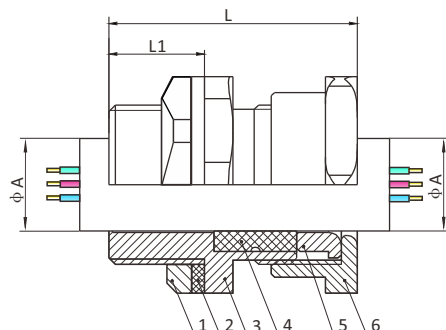

KBM-07

- 1.Locknut 2.Sealing washer 3.Connector body
4.Sealing ring 5.Washer 6. Compression nut

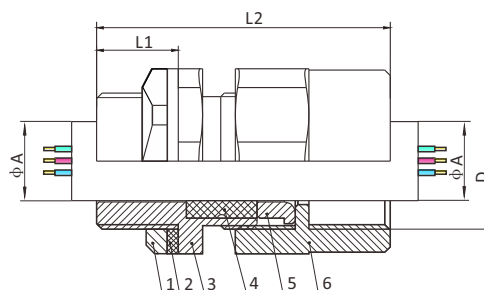

KBM-08

- 1.Locknut 2.Sealing washer 3.Connector body
4.Sealing ring 5.Washer 6. Compression nut

Mounting thread		Cable outer diameter ϕA (mm)	Flat cable (mm)			Thread length L1(mm)	Length L(mm)	Length L2(mm)	Maximum outer diameter (mm)	KBM-07 Weight (kg)	KBM-08 Weight (kg)
M	NPT		Outer diameter ϕA	L	L1						
M16×1.5	—	3~8	—	—	—	16	55	70	27	0.10	0.11
M20×1.5A	NPT1/2A	3~8	11×7(±1)	39	57	16	55	70	27	0.12	0.12
M20×1.5B	NPT1/2B	6~11	11×7(±1)	39	57	16	55	70	27	0.10	0.14
M20×1.5C	NPT1/2C	10~14.5	15×6(±1)	40	57	16	56	71	33	0.12	0.14
M25×1.5A	NPT3/4A	6~11	11×7(±1)	38	57	16	55	70	33	0.15	0.17
M25×1.5B	NPT3/4B	10~14.5	15×6(±1)	38	55	16	56	71	33	0.15	0.17
M25×1.5C	NPT3/4C	13~20	—	—	—	16	62	75	39	0.16	0.18
M32×1.5A	NPT1A	10~14.5	15×6(±1)	45	60	16	56	71	39	0.25	0.28
M32×1.5B	NPT1B	13~20	—	—	—	18	64	77	39	0.25	0.28
M32×1.5C	NPT1C	19.5~25.5	—	—	—	18	67	82	50	0.27	0.30
M40×1.5A	NPT1 1/4A	13~20	—	—	—	18	64	79	50	0.55	0.58
M40×1.5B	NPT1 1/4B	19.5~25.5	—	—	—	20	69	84	50	0.50	0.54
M40×1.5C	NPT1 1/4C	25~32	—	—	—	20	73	88	60	0.60	0.64
M50×1.5A	NPT1 1/2A	19.5~22.5	—	—	—	20	69	84	60	0.79	0.84
M50×1.5B	NPT1 1/2B	25~32	—	—	—	20	73	88	60	0.69	0.74
M50×1.5C	NPT1 1/2C	32~43	—	—	—	20	82	97	73	0.86	0.91
M63×1.5A	NPT2A	25~32	—	—	—	20	73	88	73	0.86	0.92
M63×1.5B	NPT2B	32~43	—	—	—	20	84	99	73	0.84	0.90

Note: 1. Locknut and sealing washer (PTFE washer) are supplied for Ex e, n, t type products,
Without lock nut when delivery for Ex d type. Above weight is based on nickel plated brass material.
2. Earth lug and shroud are on request.
3. The standard pitch of metric thread products is 1.5mm, other pitches can be customized, please specify when ordering.