



LED Explosion Proof Light

**ATEX & IECEx Certified LED Floodlight Hazardous Area.
Tank Series**

⚡ II 2 G Ex db IIC T* Gb

⚡ II 2 D Ex tb IIIC T* Db IP66





Features And Benefits:

- High efficacy LED Source with long lifespan, L70 > 100,000 hours @ 25°C ambient
- 5-year performance warranty
- Low THD around 10%, Less interference
- 6KV Surge Protection
- Robust aluminium housing and strong tempered glass
- Vibration and shock resistant
- Low maintenance
- Dust proof structure design to avoid dust accumulation

Applications:



Oil&Gas Exploration



Drilling



Oil Refinery



Petrochemical Plant



Power Plant



Pharmaceutical Plant



ATEX & IECEx Certified LED Floodlight in Hazardous Area.

LED Floodlight

Standard & Certificate:

Ex Mark:	Gas: II 2 G Ex db IIC T* Gb Dust: II 2 D Ex tb IIIC T* Db IP66
Certificate:	ATEX Certification NO.: TÜV 21 ATEX 8775 X IECEx Certification NO.: IECEx TUR 21.0070X
Executive Standard:	(IEC)EN 60079-0, (IEC)EN 60079-1, (IEC)EN 60079-28, (IEC)EN 60079-31 EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3, EN 60598-1, EN 60598-2-5, EN 62031, EN 62493, IEC 62321-4, IEC 62321-5, IEC 62321-6, IEC 62321-7-1 IEC 62321-7-2, IEC 62321-8
Classification:	Group II, Zone 1 & 21 and 2 & 22

Electrical & Photometric Features:

Luminaire Efficacy:	Max:152lm/W
Lifespan:	>100,000 hours
Operating Voltage:	100-277 VAC, 20-30 VAC, 347-480 VAC, 141-392VDC, 491-679 VDC
Power:	80W/100W/120W(Single lamp), 160W/200W/240W(Two lamps), 320W/400W/480W(Four lamps)
Frequency:	50/60Hz
Power Factor:	>0.98
THD:	<10%
CRI:	>70
Insulation Class:	I
Surge Protection:	4KV/6KV
LED Driver:	Over voltage protection/short circuit protection


Mechanical Features:

Weight:	8.3Kg(80W~120W)/15Kg(160W~240W)/32kg(320W~480W)
Size:	332*212*142mm(80W~120W)/332*426*142mm(160W~240W) /671*426*142mm(320W~480W)
Ambient Temperature:	-40°C~+55°C
Connecting Terminals:	3*1.0-4mm ² (L+N+PE)
Cable Entries:	2XM20*1.5 (NPT 3/4", M25*1.5 are optional)
Earthing Protection:	M4 (Internal & external earth bolts)
IP Code:	IP66
Enclosure Material:	Aluminium
Enclosure Colour:	Grey RAL7040
Coating:	Epoxy powder coating
Exposed Fastener:	Stainless steel
Protective Cover:	Tempered glass, Stand 7J impact

Product Differentiation

Rated Power	Operating Voltage:			Temp. Classification	
	100-277VAC	347-480VAC	20-30VAC/DC	-40°C~+55°C	-40°C~+60°C
80W	●	●	●	T5	T5
100W	●	●	●	T5	T5
120W	●	●	●	T5	T5
160W	●	●	/	T5	T4
200W	●	●	/	T5	T4
240W	●	●	/	T5	T4
320W	●	●	/	T5	T4
400W	●	●	/	T5	T4
480W	●	●	/	T5	T4

Production Definition

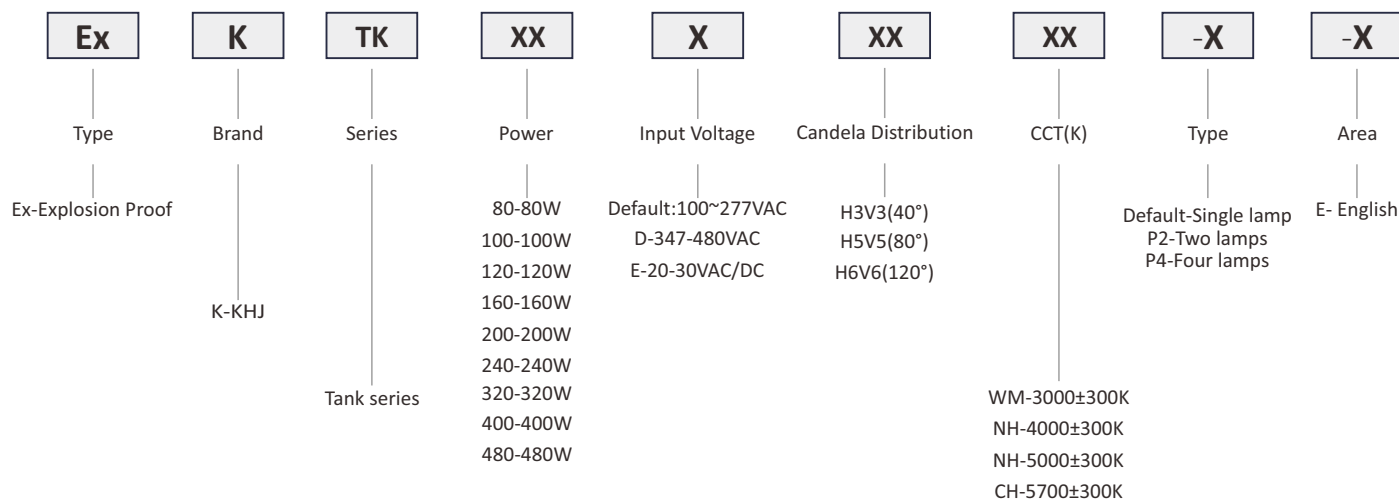

Ordering information


P/N	Operating Voltage(V)	Luminous Flux(lm)	Power(W)	Color Temp.	CCT(K)	Temp. Classification -40°C~+55°C
Ex-KTK80**CH-E	100-277 VAC (141-392 VDC)	12107	80	Cool white	5700K±300K	T5
Ex-KTK80**NH-E		12107		Natural white	5000K±300K	T5
Ex-KTK80**NH-E		12107		Natural white	4000±300k	T5
Ex-KTK80**WM-E		10896		Warm white	3000±300k	T5
Ex-KTK100**CH-E		14954	100	Cool white	5700±300k	T5
Ex-KTK100**NH-E		14954		Natural white	5000±300k	T5
Ex-KTK100**NH-E		14954		Natural white	4000±300k	T5
Ex-KTK100**WM-E		13458		Warm white	3000±300k	T5

Ordering information


P/N	Operating Voltage(V)	Luminous Flux(lm)	Power(W)	Color Temp.	CCT(K)	Temp. Classification -40°C~+55°C
Ex-KTK120**CH-E	100-277 VAC (141-392 VDC)	17310	120	Cool white	5700±300k	T5
Ex-KTK120**NH-E		17310		Natural white	5000±300k	T5
Ex-KTK120**NH-E		17310		Natural white	4000±300k	T5
Ex-KTK120**WM-E		15579		Warm white	3000±300k	T5
Ex-KTK160**CH-P2-E		22910	160	Cool white	5700K±300K	T5
Ex-KTK160**NH-P2-E		22910		Natural white	5000K±300K	T5
Ex-KTK160**NH-P2-E		22910		Natural white	4000±300k	T5
Ex-KTK160**WM-P2-E		20619		Warm white	3000±300k	T5
Ex-KTK200**CH-P2-E		29145	200	Cool white	5700±300k	T5
Ex-KTK200**NH-P2-E		29145		Natural white	5000±300k	T5
Ex-KTK200**NH-P2-E		29145		Natural white	4000±300k	T5
Ex-KTK200**WM-P2-E		26230		Warm white	3000±300k	T5
Ex-KTK240**CH-P2-E		34136	240	Cool white	5700±300k	T5
Ex-KTK240**NH-P2-E		34136		Natural white	5000±300k	T5
Ex-KTK240**NH-P2-E		34136		Natural white	4000±300k	T5
Ex-KTK240**WM-P2-E		30884		Warm white	3000±300k	T5
Ex-KTK320**CH-P4-E		46400	320	Cool white	5700±300k	T5
Ex-KTK320**NH-P4-E		46400		Natural white	5000±300k	T5
Ex-KTK320**NH-P4-E		46400		Natural white	4000±300k	T5
Ex-KTK320**WM-P4-E		41760		Warm white	3000±300k	T5
Ex-KTK400**CH-P4-E		58054	400	Cool white	5700±300k	T5
Ex-KTK400**NH-P4-E		58054		Natural white	5000±300k	T5
Ex-KTK400**NH-P4-E		58054		Natural white	4000±300k	T5
Ex-KTK400**WM-P4-E		52248		Warm white	3000±300k	T5
Ex-KTK480**CH-P4-E		69120	480	Cool white	5700±300k	T5
Ex-KTK480**NH-P4-E		69120		Natural white	5000±300k	T5
Ex-KTK480**NH-P4-E		69120		Natural white	4000±300k	T5
Ex-KTK480**WM-P4-E		62208		Warm white	3000±300k	T5

Remarks: 1.The first * stands for Operating Voltage including default -100-277VAC, D-347-480VAC ,E-20-30VAC.
2.The second * stands for Candela Distribution including H3V3,H5V5,H6V6.


Candela Distribution

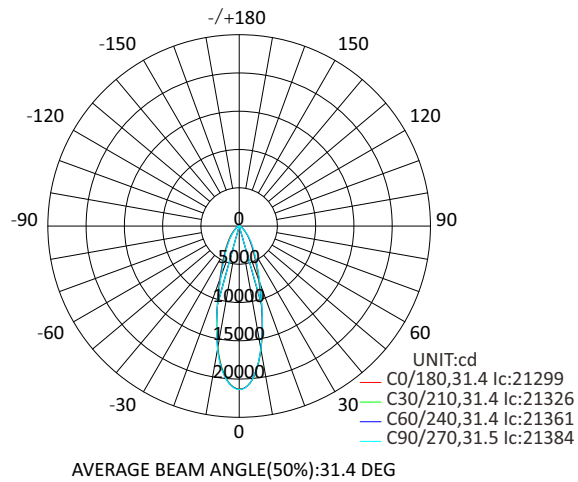

H3V3(40°)/High efficacy LED Source

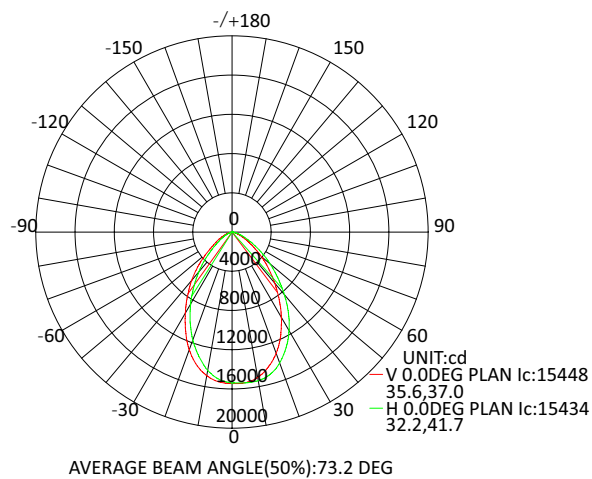

H5V5(80°)/High efficacy LED Source

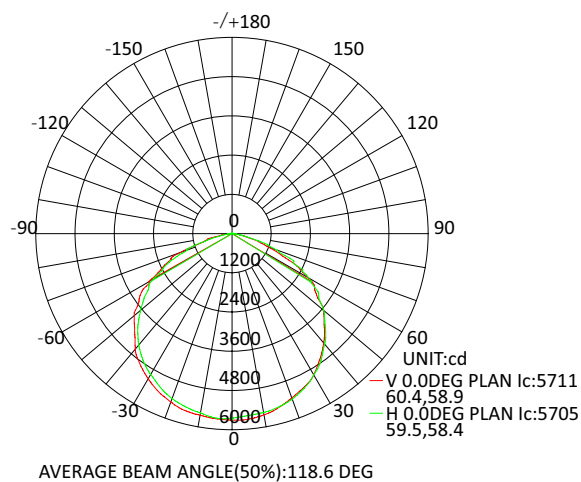

H6V6(120°)/High efficacy LED Source






Installation Method

Stanchion mount / Wall mount




(unit:mm)

360°ROTATION(EVERY15° IS A ROTATION ANGLE)

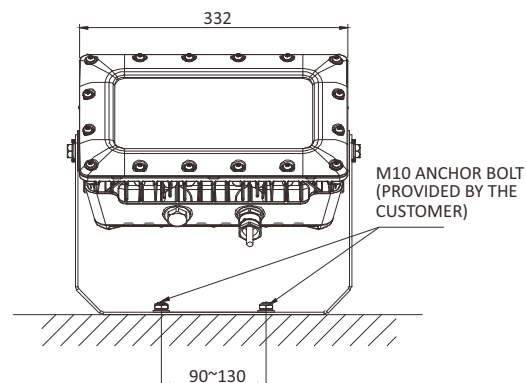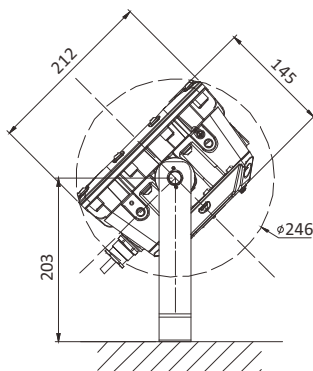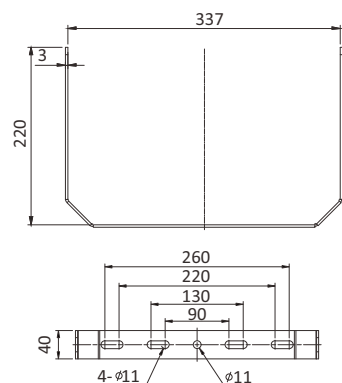




SBT-TK-SUS316
Single lamp

360°ROTATION(EVERY15° IS A ROTATION ANGLE)

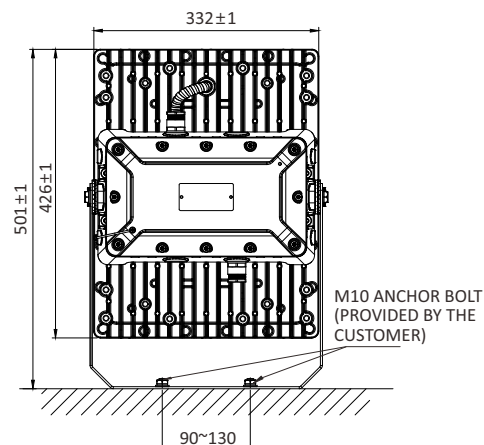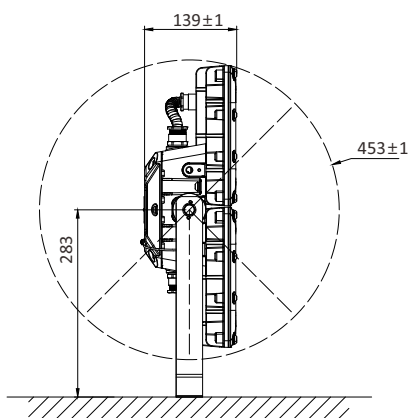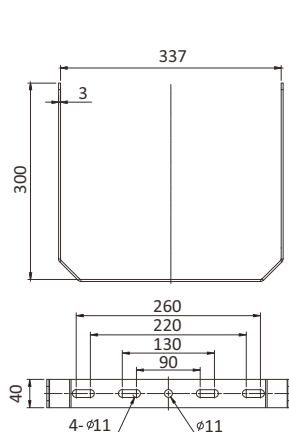

SBT-TK-2-SUS316
Two lamps


360°ROTATION(EVERY15° IS A ROTATION ANGLE)

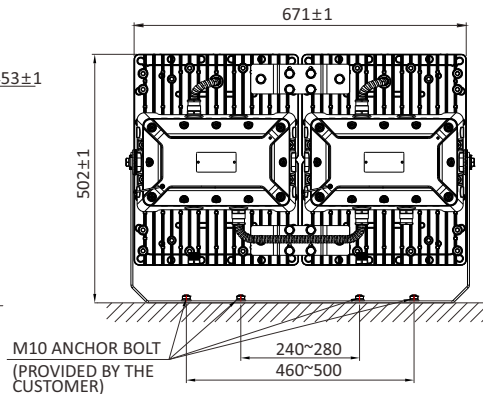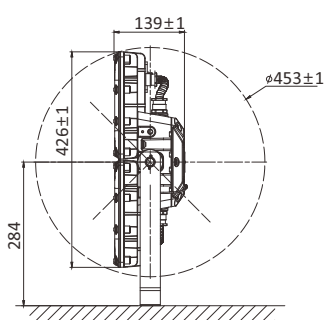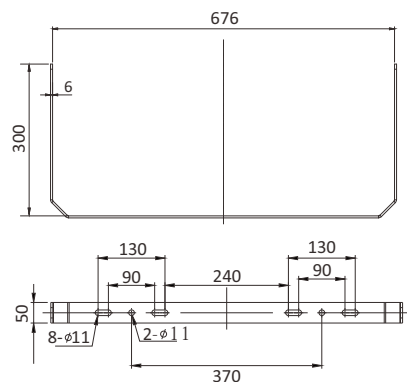


SBT-TK-4-G
Four lamps

Installation Method


Ceiling mount:

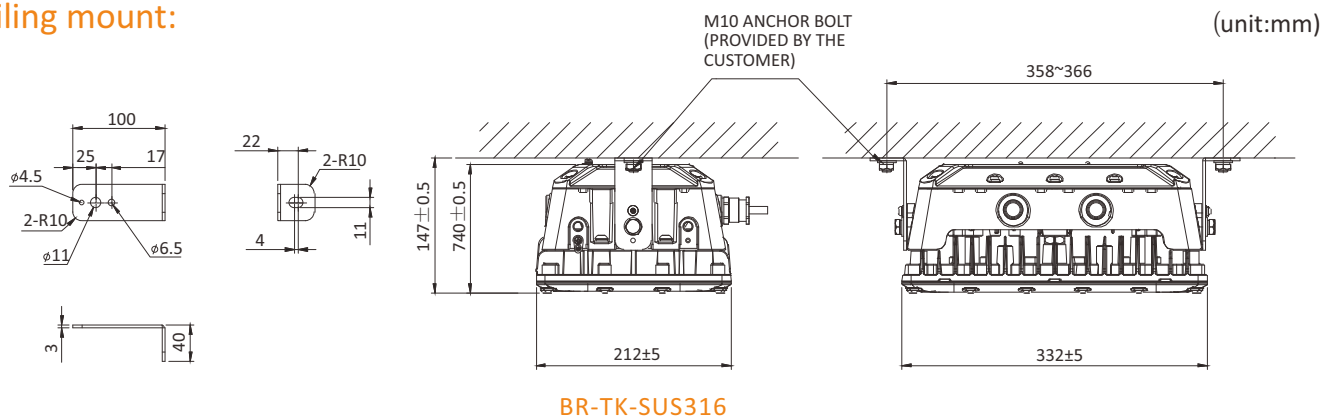

Single lamp

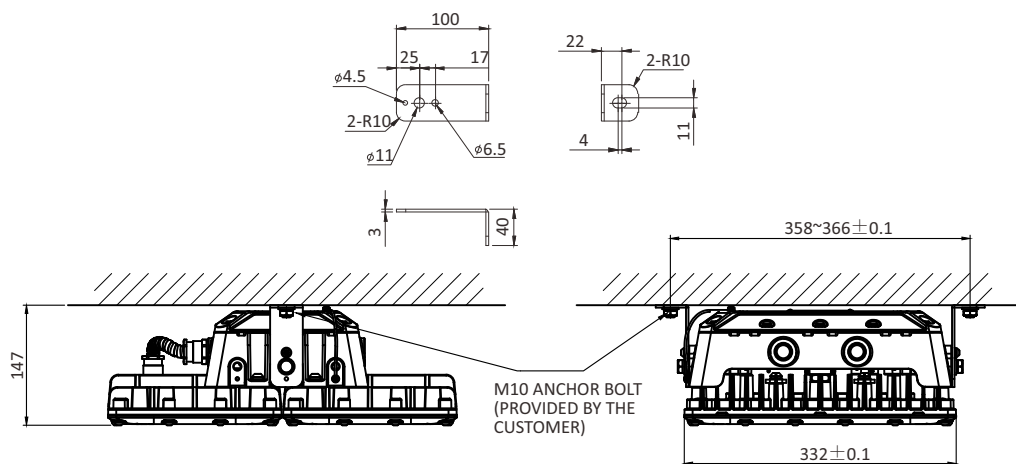

Two lamps

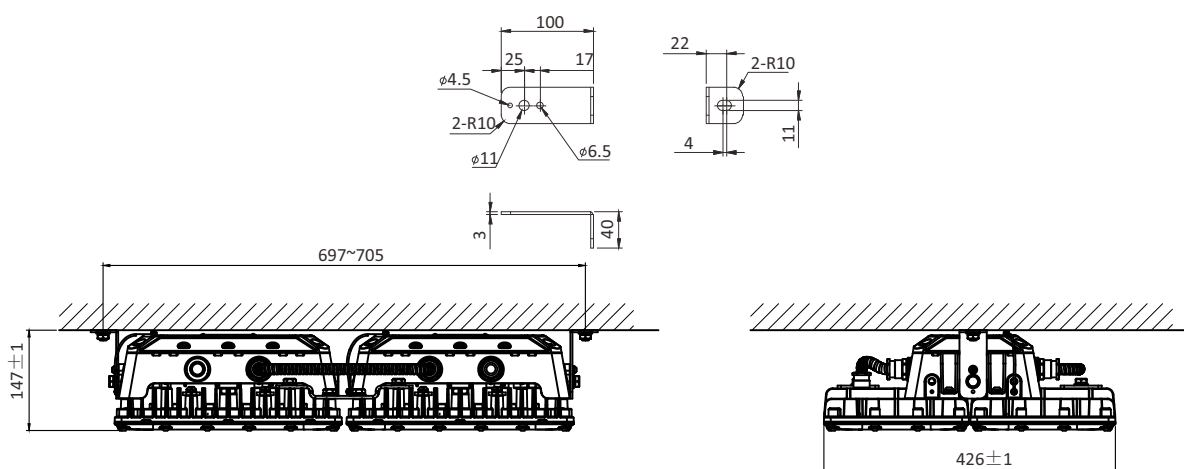


Four lamps

Installation Method

Pole Mount:

(unit:mm)


360°ROTATION(EVERY15° IS A ROTATION ANGLE)

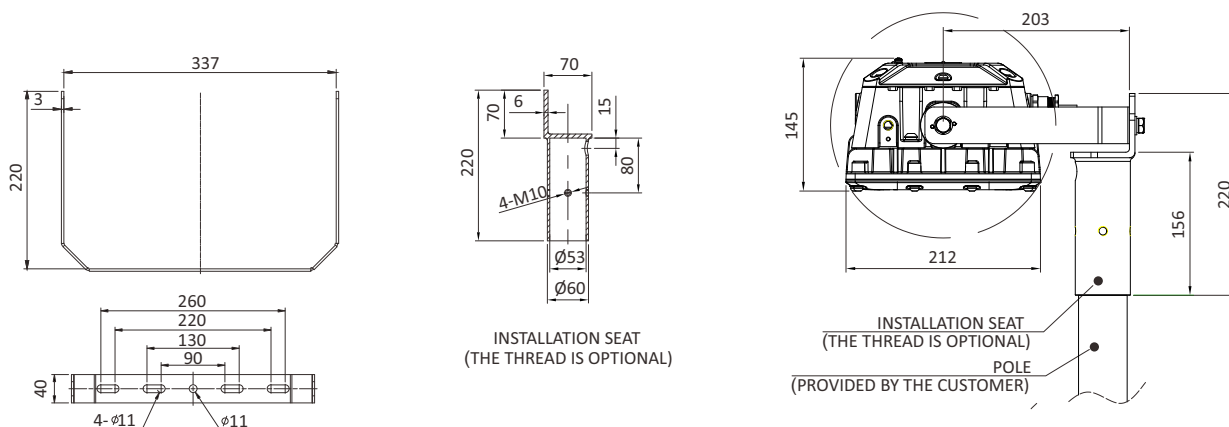

(SBT-TK-SUS316)+(SBT2-F-G)
Single lamp

360°ROTATION(EVERY15° IS A ROTATION ANGLE)


(unit:mm)

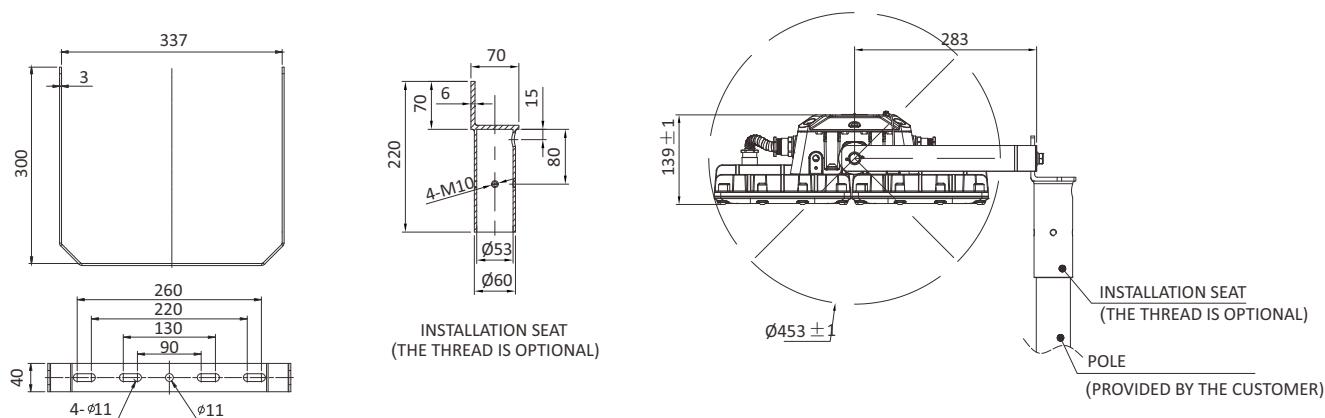

(SBT-TK-2-SUS316)+(SBT2-F-G)
Two lamps

Remarks: Pole mount bracket for four lamps needs to be customized.

Optional Parts

No.	Installation Accessories	Part No.	Picture	Material	Weight(Kg)	QTY		Remarks
1	Ceiling Bracket	BR-TK-SUS316		SUS316	0.9	Single lamp	1	/
						Two lamps	1	
						Four lamps	1	
2	Stanchion Bracket	SBT-TK-SUS316		SUS316	0.8	1		Single lamp
3	Stanchion Bracket	SBT-TK-2-SUS316		SUS316	1	1		Two lamps
4	Stanchion Bracket	SBT-TK-4-G		Q235	3	1		Four lamps
5	Pole Mount Bracket	(SBT2-F-G) +(SBT-TK-SUS316)		SUS316+Q235	2.4	1		Single lamp
6	Pole Mount Bracket	(SBT2-F-G) +(SBT-TK-2-SUS316)		SUS316+Q235	2.6	1		Two lamps