


ARMoured CABLE GLANDS



KDCG SERIES

TECHNICAL DETAILS

Type	: KDCG (Double compression gland)
Protection code	: I M2 Ex db I Mb/II 2G Ex db IIC Gb/II 2D Ex tb IIIC Db
Certificate	: IEP 20 ATEX 0754 X
Material	: MS58 Brass with nickel plated Stainless steel AISI316L / Aluminium
Standards	: EN 60079-0:2012, 60079-1:2007, 60079-31:2009
Protection class	: IP66
Temperature	: -60 °C +180 °C
Application area	: ZONE1, ZONE2, ZONE21, ZONE22, Gas Group IIA, IIB, IIC
Cable type	: SWA (Single wire armour) (STA & other cables optional)

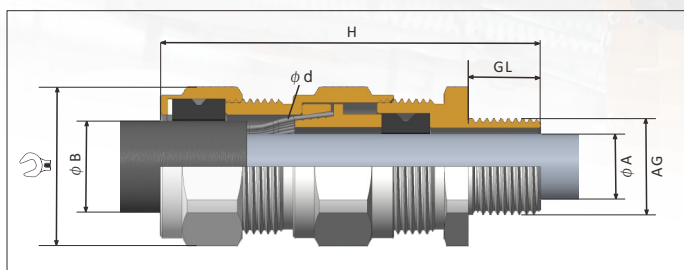

PRODUCT DEFINITION

K	DCG	X	X	X	X
Brand	Series	Material Type	Seal type	Product Size	Entry Thread size
K-KHJ	DCG-Double compression gland	N-MS58 Brass with nickel plated Ss-AISI316L Stainless Steel A-Aluminium	4-Silicone Washer	25s	AG M25s x 1,5 3/4"

CABLE GLAND SELECTION TABLE

Product Size	Product Code	Entry Thread size		Inner Sheath "A"		Outer Sheath "B"		Ø d (Armour)		Thread length "GL" min.(mm)	H mm	mm
		Metric"AG"	NPT"AG"	Min	Max	Min	Max	Min	Max			
25s	KDCGX4-25s-X	M25sx1,5	3/4"	11,1	19,9	14	22	1,25	1,60	15	89	38

Contact

SHENZHEN KHJ SEMICONDUCTOR LIGHTING CO., LTD.

Address: 4-5 Floor, Building 1,Chuangxin industrial park,Xintian community,Guanlan, Longhua new district, Shenzhen ,China.

Tel: +86-755-82949977

E-mail: khjledsales@khj.cn

Fax: +86-755-82949800

Web: www.khjled.com