


UNARMoured CABLE GLANDS



KUG SERIES

TECHNICAL DETAILS

Type	: KUG (Un-ar) Unarmoured gland
Protection code	: I M2 Ex db I Mb / I M2 Ex eb I Mb II 2G Ex db IIC Gb / II 2G Ex eb IIC Gb II 2D Ex tb IIC Db
Certificate	: IEP 20 ATEX 0755 X
Material	: MS58 Brass with nickel plated
Standards	: EN 60079-0:2012, 60079-7:2007, 60079-1:2007 60079-31:2009
Protection class	: IP66
Temperature	: -60 °C +180 °C
Application area	: ZONE1, ZONE2, ZONE21, ZONE22, Gas Group IIA, IIB, IIC
Cable type	: Unarmoured

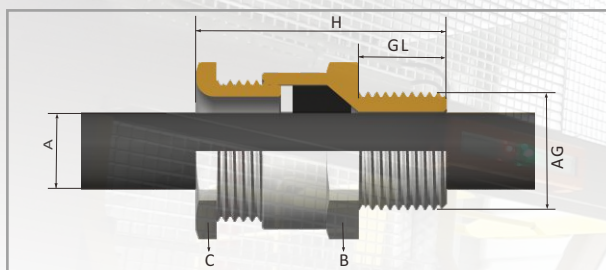

PRODUCT DEFINITION

K	UG	X	X	X	X
Brand	Series	Material Type	Seal type	Product Size	Entry Thread size
K-KHJ	UG-(Un-ar) Unarmoured gland	N-MS58 Brass with nickel plated	4-Silicone Washer		AG
				20s	M20
				25	M25
				25s	M25

CABLE GLAND SELECTION TABLE

Product Size	Entry Thread size Metric "AG"	φA		Thread length "GL" min.(mm)	H mm	C		
		Min	Max			mm	mm	B
20s	M20*1.5 ★	6,1	13,2	15	27,8	27		27
25s	M25*1.5 ★	9,5	15,9	15	36,8	27		32
25	M25*1.5	12,5	20,5	15	36,8	36		36

Contact

SHENZHEN KHJ SEMICONDUCTOR LIGHTING CO., LTD.

Address: 4-5 Floor, Building 1, Chuangxin industrial park, Xintian community, Guanlan, Longhua new district, Shenzhen, China.

Tel: +86-755-82949977

E-mail: khjledsales@khj.cn

Fax: +86-755-82949800

Web: www.khjled.com